

Thank you for purchasing AROMA AG-15A, please read this manual carefully before your operation.

AROMA®

aromamusic.cn

© 2017 Aroma Music Co., Ltd.

Precautions

Location

Using the unit in the following locations can result in a malfunction.

- In direct sunlight
- Locations of extreme temperature or humidity
- Excessively dusty or dirty locations
- Locations of excessive vibration
- Close to magnetic fields

Power supply

Be sure to turn the power OFF when the unit is not in use.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Handling

To avoid breakage, do not apply excessive force to the switches or controls.

Care

If the exterior becomes dirty, wipe it with a clean, dry cloth. Do not use liquid cleaners such as benzene or thinner, or cleaning compounds of flammable polishes.


Keeping foreign matter out of your equipment

Never set any container with liquid in it near this equipment. If liquid gets into the equipment, it could cause a breakdown, fire, or electrical shock. Be careful not to let metal objects get into the equipment.

Keep this manual

After reading this manual, please keep it for later reference.

Panel Controls

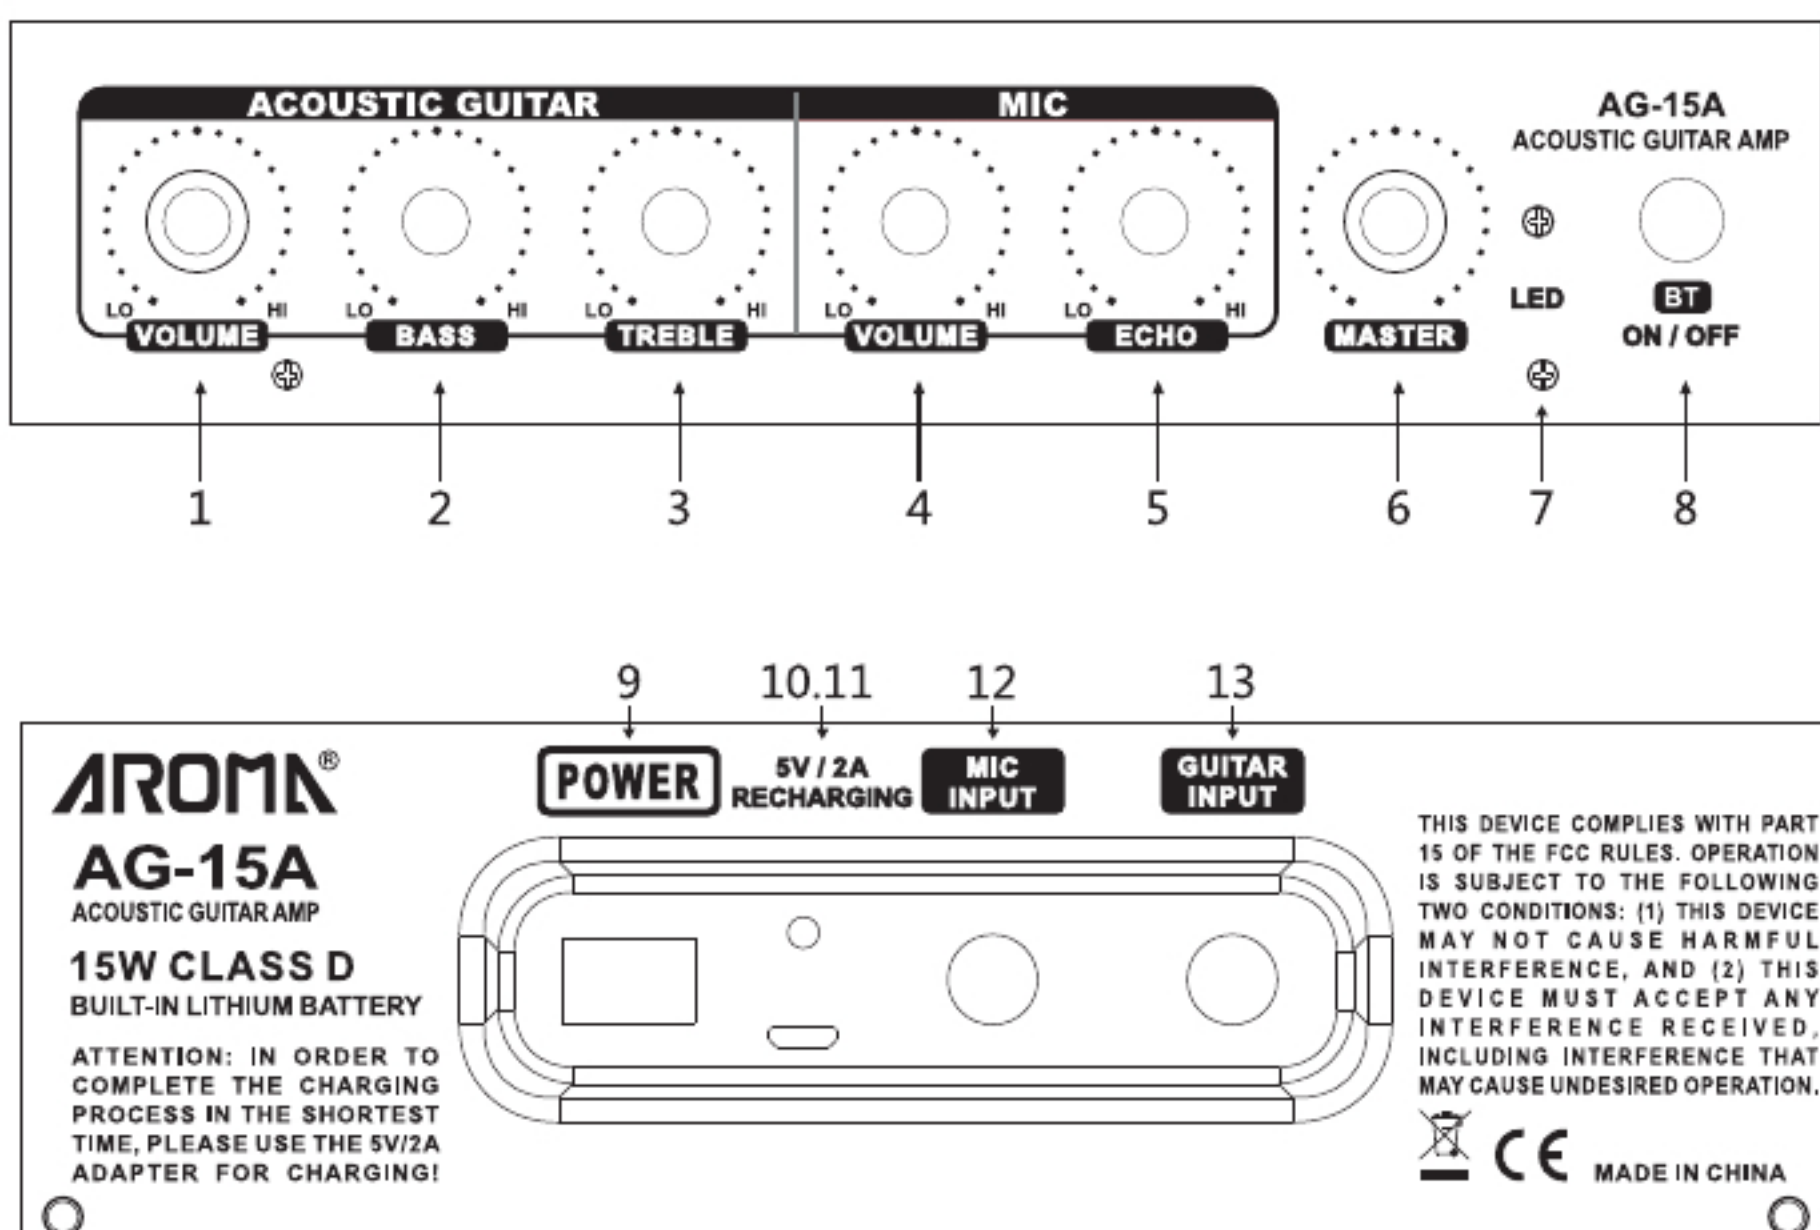

- 1.VOLUME(GUITAR).....control guitar volume
- 2.BASS(GUITAR).....control guitar low frequency tone
- 3.TREBLE(GUITAR).....control guitar high frequency tone
- 4.VOLUME(MIC).....control microphone output volume
- 5.ECHO(MIC).....control microphone output echo level
- 6.MASTER.....control master volume of guitar and mic
- 7.LED.....amp work condition light
(blue color, details at Table)
- 8.BT.....blue tooth switch
- 9.POWER.....switch power On/Off
- 10.LED.....power recharging condition light
(red color, details at Table)
- 11.MicroUSB.....power recharging jack for USB cable(5V/2A)
- 12.MIC INPUT.....microphone cable input jack
- 13.GUITAR INPUT.....guitar cable input jack

Table

	Work condition	Blue LED indicator	Red LED indicator
Power On	Power more than 30%	Light On	/
	Power less than 30%	Light flashes fast	/
	Power less than 5%	Light flashes extremely and Power Off in 3 seconds	/
Bluetooth On	Playing	Light flashes slowly	/
	Pause playback	Light On	/
Recharging condition	Recharging duration	/	Light On
	Recharging full	/	Light On

Use Tip: During power recharging, the amp is Off automatically and not for use.

Amp Features

- 1.No need of external power supply, enjoy your music anytime anywhere, Portable design brings you infinite joy.
- 2.Professional high quality guitar sound output.
- 3.Guitar amp equipped with wireless music play link and microphone input functions.
- 4.Perfect sound modification functions using professional amplifier and speaker, which can

amplify and modify different sounds of instruments.

- 5.Product core is made of ultra-efficient Class D amplifier and powerful energy storage battery, which makes the products in a stable output while maintaining the longest battery life, with enclosed USB cable to recharge the amp easily with your cell phone adapter or portable power bank.

How to Use Guitar Function

- 1.Turn power ON, the indicator light is lit a color, which differs to different powerlevel.
- 2.Link your acoustic guitar by a cable to GUITAR INPUT socket.
- 3.Adjust Guitar Volume, Bass and Treble knobs and Master knob to get a suitable volume and tone output.

How to Use Mic Function

- 1.Link your moving coil microphone cable to MIC INPUT socket.
- 2.Adjust Mic Volume knob and MASTER knob to get a comfortable volume.
- 3.Adjust ECHO knob to get a satisfied echo effect.

Product Parameter

Channel 1 (guitar)	Channel 2 (mic)
Input socket: 6.35mm gauge jack x 1	Input socket: 6.35mm gauge jack x 1
Input impedance: 10Kohm	Input impedance: 1Kohm
EQ: bass, treble	Echo control
Volume control	Volume control
Rated power: 10W	Battery: 7.4V / 2200mAH Li-battery
Peak power: 15W	Battery life: ≥ 5H (80% volume level)
Speaker: 5 inch, full range,20W x 1;	Recharge duration:< 3 H(2A)
Recharge socket: Micro USB 5V/2A	

Specifications

Net weight: 2.1kg	Gross weight: 2.3kg
Dimension: 215x156.5x153.5mm	Package size: 262x190x190mm
Package Contents: AG-15A amp, handle x1, micro USB cable x1, operation manual.	

FCC Warning:

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.